

User Instruction Sheet

Select the suitable glove size using the label. Before usage, inspect the gloves for any defects. If the gloves are defective, dispose them immediately. If in doubt do not use the gloves, get a new pair of gloves.

EN 420:2003+A1:2009

- Name and full address of manufacturer or his authorized representative.
Advansafety, Biyagama Export Processing Zone – A, Walgama, Malwana, Sri Lanka
- Name & address of the notified body responsible for both EU Type Examination and on-going conformity:
SATRA Technology Europe Ltd., Bracetown Business Park, Clonee, Dublin 15, D15 YN2P, Ireland, NB No.: 2777
- Glove designation (name or reference):
330-24SD - Neoprene, Flock Lined, 24mil (0.61mm) Work Glove (Bicolor – Blue/Yellow)
Natural Rubber neoprene blended Black variant
- Information on the available size range Full Dipped Sizes: 7, 8, 9, 10, 11 & 12
- Reference to the relevant specific European standards
EN 388:2016
EN 420:2003+A1:2009
EN374-2:2014
EN16523-1:2015
EN 374-1:2016
EN 374-4:2013
- Certified performance level of the product as follows. Product is considered to be Category III of PPE hand protection and certified in accordance with PPE regulation (EU) 2016/425


Standard	Claus/Property	Results
EN 388:2016 (After 5 Washing Cycles)	6.1 Abrasion Resistance	Level 3
	6.2 Blade Cut Resistance	Level 1
	6.4 Tear resistance	Level 2
	6.5 Puncture resistance	Level 1
EN420:2003+A1:2009	5.1 Length & Fit	Pass
	5.2 Dexterity	Level 5

EN 374-1:2016

Method	Chemical Name	Performance level
EN 16523-1:2015	Methanol 67-56-1	6
EN 16523-1:2015	Ammonium Hydroxide 25% 1336-21-6	4
EN 16523-1:2015	Sodium hydroxide 40% 1310-73-2	6
EN 16523-1:2015	Sulphuric acid 96% 7664-93-9	5
EN 16523-1:2015	Nitric acid 65% 7697-37-2	6
EN 16523-1:2015	Acetic acid 99% 64-19-7	5
EN 16523-1:2015	Hydrogen Peroxide 30% 7722-84-1	5

User Instruction Sheet

Special Note: X-mean material not considered to be suitable for this test.

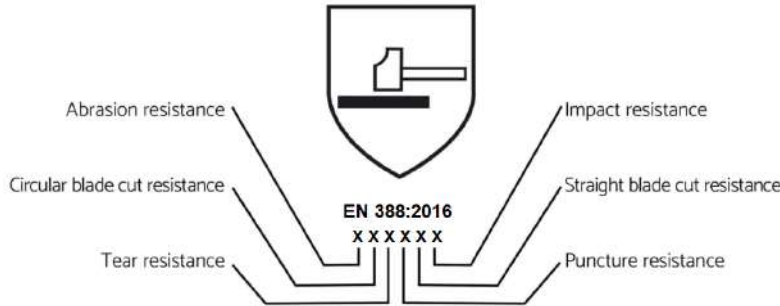


Guideline for new marking as above.

7. Product do not contain any known substances that may cause harm to the wearers health, some individual may cause Allergic reaction due to natural rubber content available in glove.
8. Washing & cleaning instructions:
Wipe clean only
9. Declaration of conformity can be viewed by visiting this link? <http://www.advansafety.online>
10. Warning:
 - a. Gloves not be worn when there is a risk of entanglement by moving parts of machines and the glove must not come in contact with a naked flame.
 - b. This information does not reflect the actual duration of protection in the workplace due to other factors influencing the performance, such as temperature, abrasion, degradation etc.
11. Cleaning & maintenance:
The gloves should be stored in the original packing at a dry and clean place. Please avoid exposing the glove to high temperature, humidity or direct sunlight light.
12. Shelf life of product:
Recommended shelf life of product is 5 years under controlled environment condition, product should store away from direct sunlight & away from humidity. Temperature of warehouse should not exceed more than 35 degree Celsius, product should store under proper packaging.

Levels of performance EN388:2016						
Test	Level 1	Level 2	Level 3	Level 4	Level 5	
Abrasion resistance (number of cycles)	100	500	2000	8000	–	
Blade cut resistance (index)	1.2	2.5	5	10	20	
Tear resistance (N)	10	25	50	75	–	
Puncture resistance (N)	20	60	100	150	–	
Impact Protection						N/A

Example of Glove Marking:

Product Designation- 330-24SD
 Natural Rubber Neoprene blended bicolor-Blue/Yellow
 Natural Rubber neoprene blended Black variant

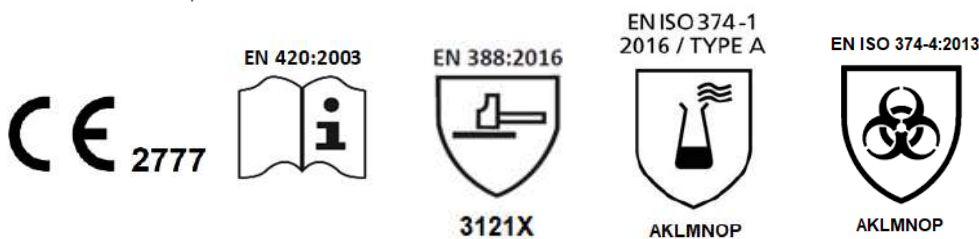

Manu. Date Xx/xx/xxxx
 Exp. Date Xx/xx/xxxx